

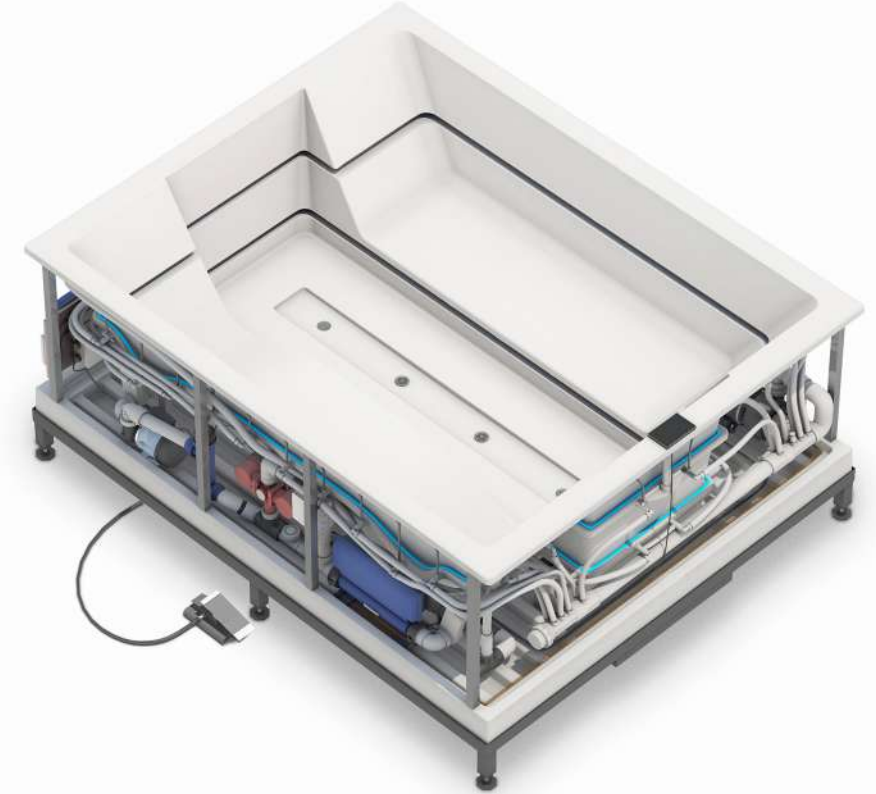


- Fill/drain water supply connection has a 3/4 female PVC fitting on the spa as standard for all fill/drain variations.
- Fill/ Drain location
- Electrical connection location
- Safety lock/ pedal

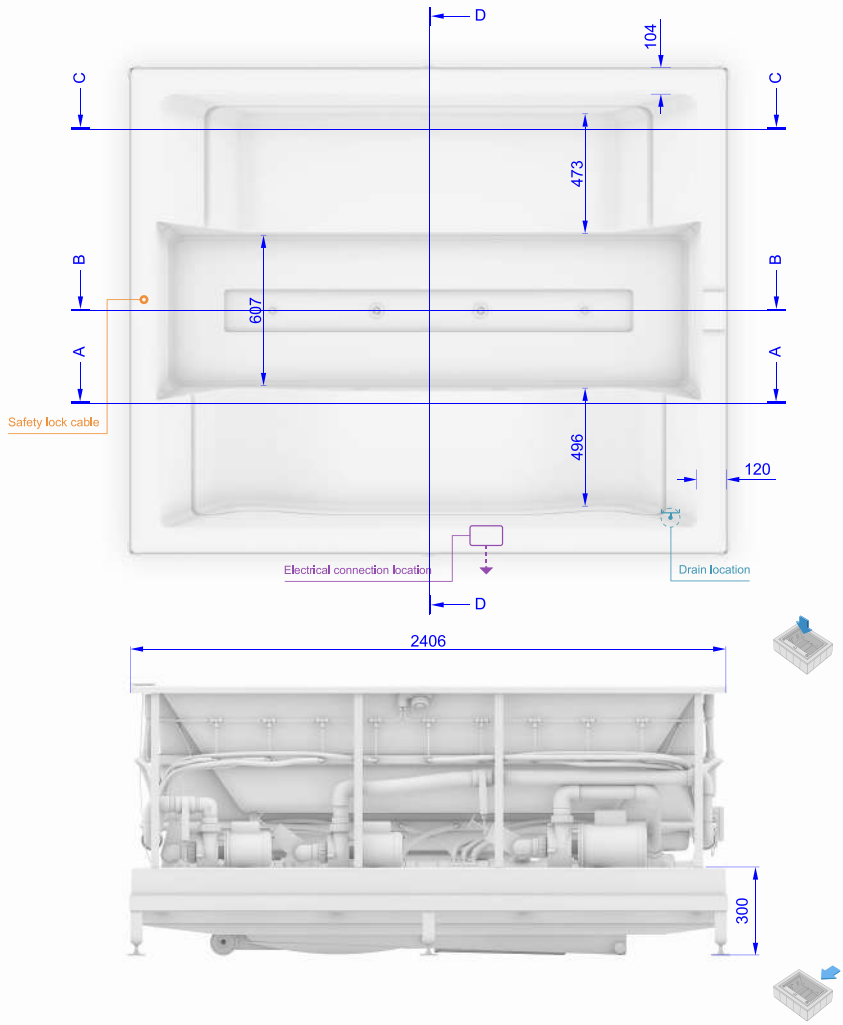


units: millimeter


DRAWN	2024-09-16	aquatica®		
...		VIBE Inground Spa		
QA				
...				
Dimensions are subject to a +/- 25 mm tolerance		SIZE	DWG NO	REV
		-		03
		SCALE		SHEET 1 OF 4

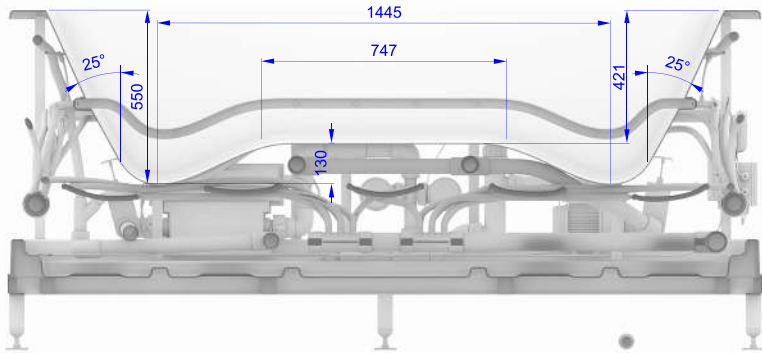


Section AA

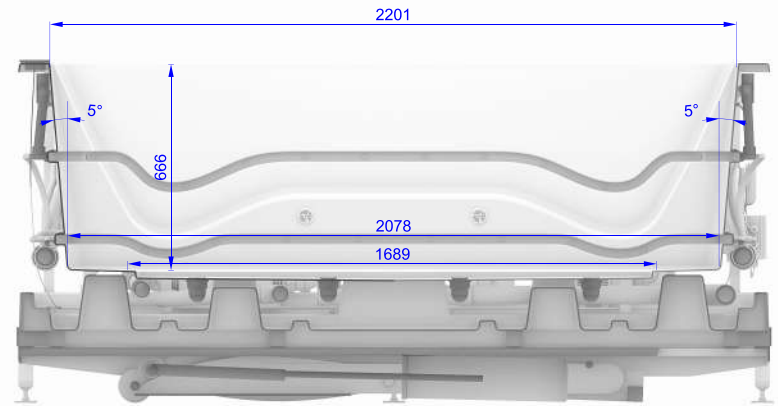

Section BB

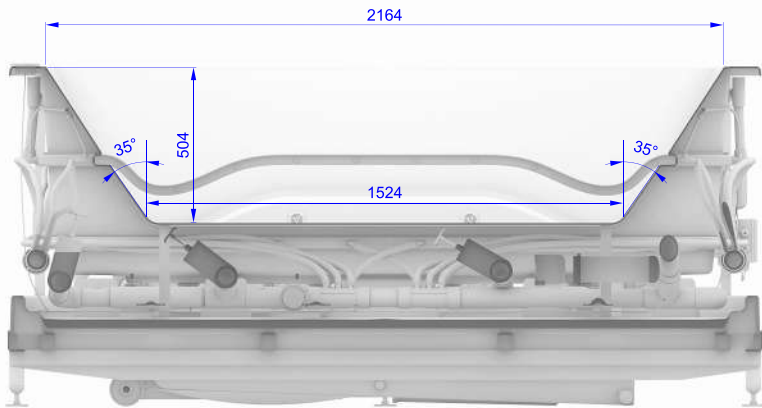


Section CC

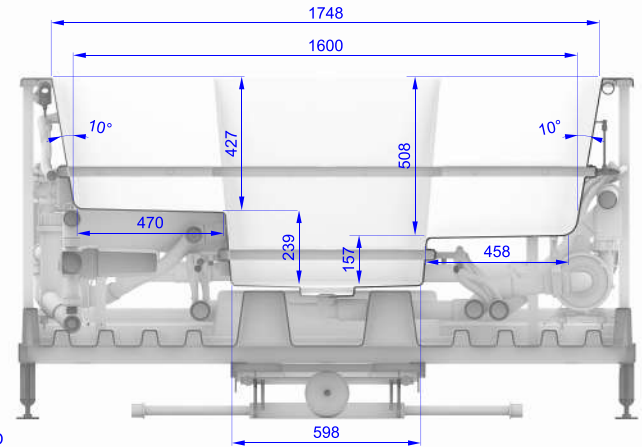

Section DD

units: millimeter

DRAWN	2024-09-16	aquatica®		
...				
QA		SIZE	DWG NO	REV
...		-		02
Dimensions are subject to a +/- 25 mm tolerance		SCALE		SHEET 2 OF 4

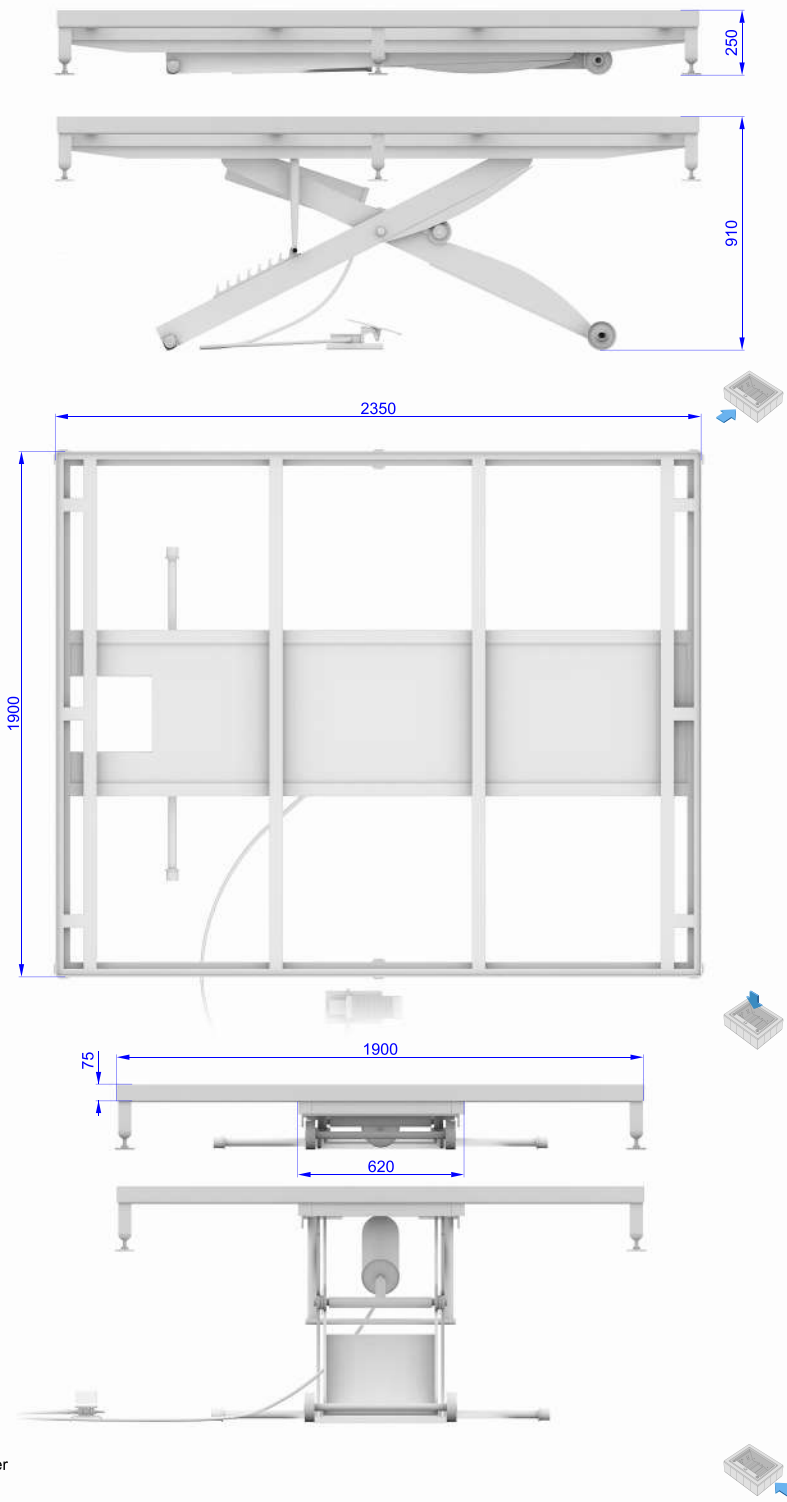


units: millimeter

■ Safety lock/ pedal




DRAWN	2024-09-16	aquatica®		
...				
QA		TITLE		
...		VIBE Inground Pneumatic Elevator		
Dimensions are subject to a +/- 25 mm tolerance		SIZE	DWG NO	REV
		-		03
		SCALE		SHEET 3 OF 4

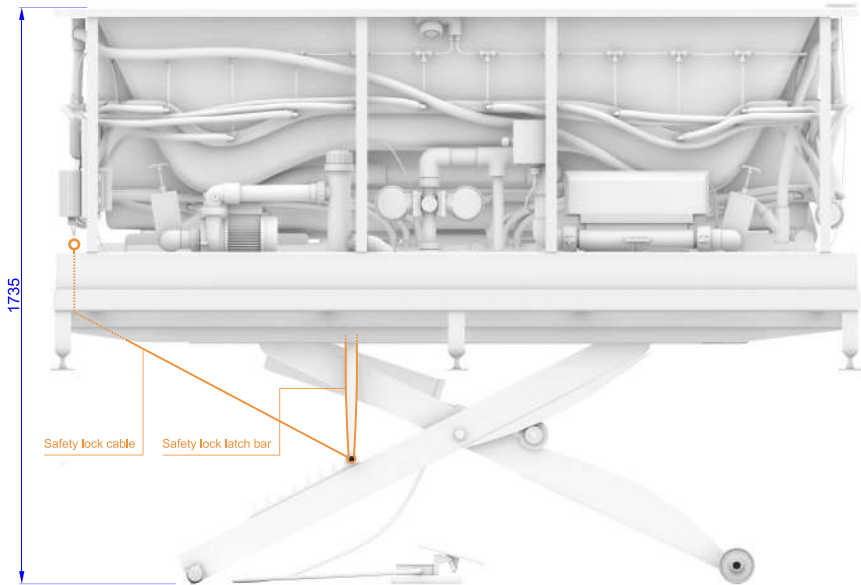


Safety lock cable

■ Safety lock/ pedal

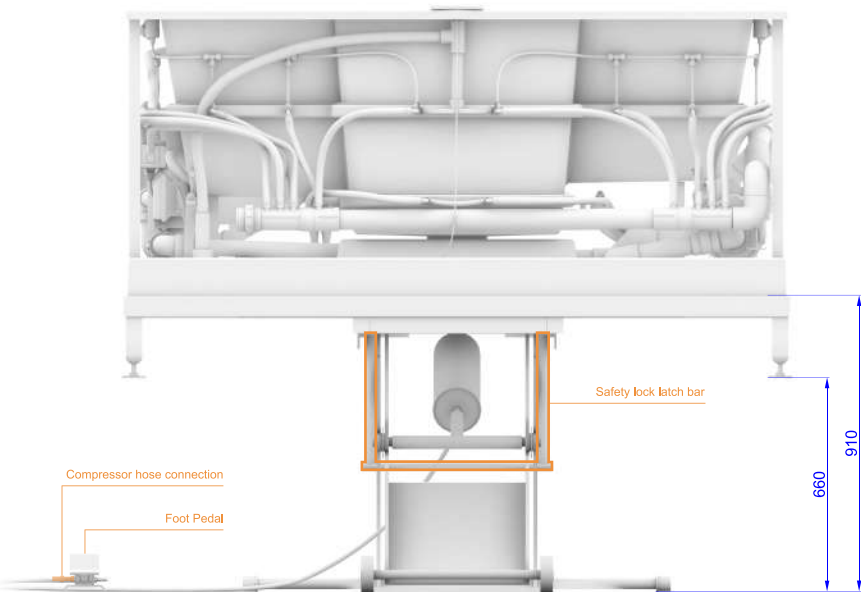

Compressor hose connection

Foot Pedal



units: millimeter

DRAWN	2024-09-16	aquatica [®] VIBE Inground Pneumatic Elevator		
...				
QA		SIZE	DWG NO	REV
...		-		04
Dimensions are subject to a +/- 25 mm tolerance		SCALE	SHEET 4 OF 4	